

GOPLUG TRAVEL ADAPTERS

ECO rPC Recycled Polycarbonate

The GoPlug Travel Adapter combines global compatibility with powerful, reliable performance. Available in two models - the 20W GoPlug and the 45W GoPlug+ - it's designed to keep all your devices charged wherever your travels take you. The 20W model offers 1xUSB-A and 2xUSB-C ports, while the 45W version adds 2xUSB-A, 2xUSB-C, and a dedicated 45W USB-C fast-charging port for laptops and tablets. Supporting plug types for USA, AUS, UK, and EU, and compatible with six international inputs, GoPlug ensures seamless use across the globe. With built-in protection against over-voltage, over-current, overheating, and short circuits, it delivers safe, dependable charging every time.

Eco-friendly & Environmentally Sustainable

The GoPlug is made up of an impressive 60% recycled polycarbonate (rPC) and uses GaN technology, which across Europe could avoid 1-2million tonnes of CO² per year- equivalent to planting around 50-90 million trees annually.

Product Size and Weight

20W	45W
Length: 55mm	Length: 55mm
Width: 54mm	Width: 54mm
Height: 64mm	Height: 69mm

20W Version Weight: 135g
45W Version Weight: 165g


Technical Specification

Max: 10A / 2500W / 100-250V~
AC-AC does not convert voltage.
Built-in regular fuse + spare.
Indoor use only.


- ✓ 20W & upgraded 45W, capable of charging iPhone 17 0-80% in 20 minutes USB-C1
- ✓ Over-voltage, over-current, overheating and short-circuit protection
- ✓ 20W- 1x USB-A & 2x USB-C | 45W- 2x USB-A, 2x USB-C, 1x USB-C 45W Fast Charging
- ✓ Converts output to 4 plug types- **USA** (Type A), **AUS** (Type I), **UK** (Type G) & **EU** (Type C)
- ✓ Compatible with 6 input plug types around the world- **US, EU, UK, AUS, CN & IN**
- ✓ Lead Time: UK Stock: 3-5 Working Days | MOQ: 30 units

Printing Area and Branding Options


Designated Branding Area

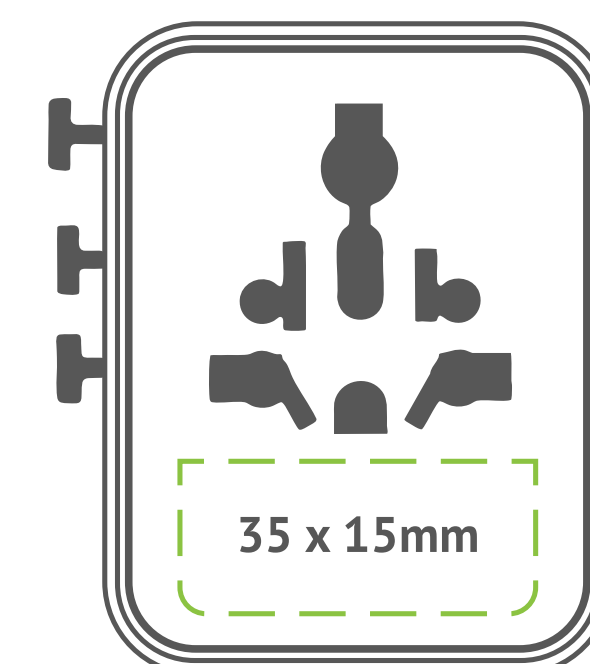


Front 20W Version

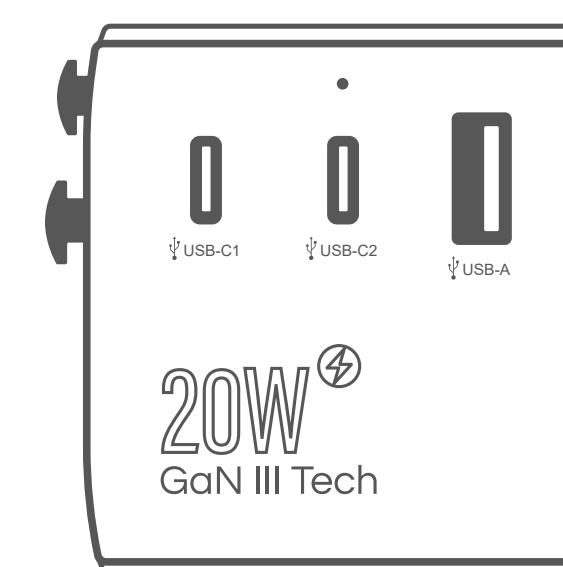


Bottom

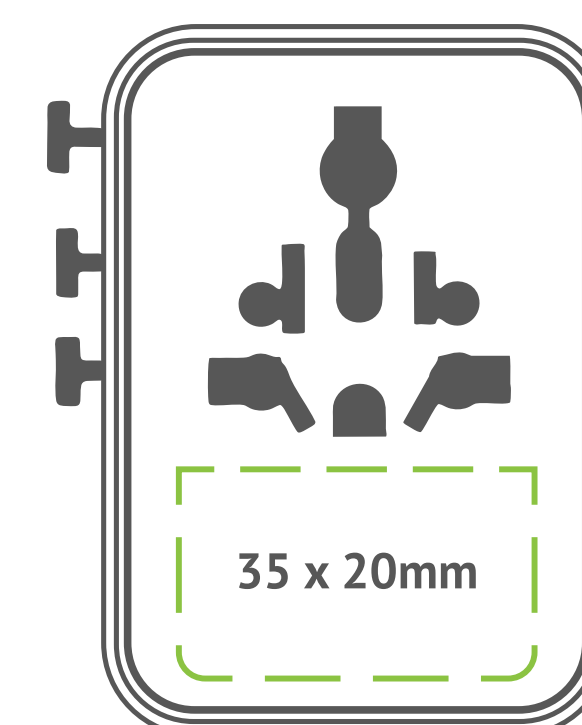

Front 45W Version

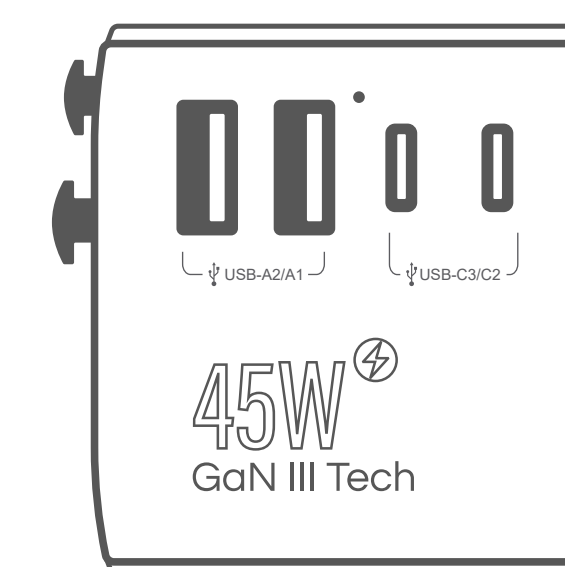

Bottom

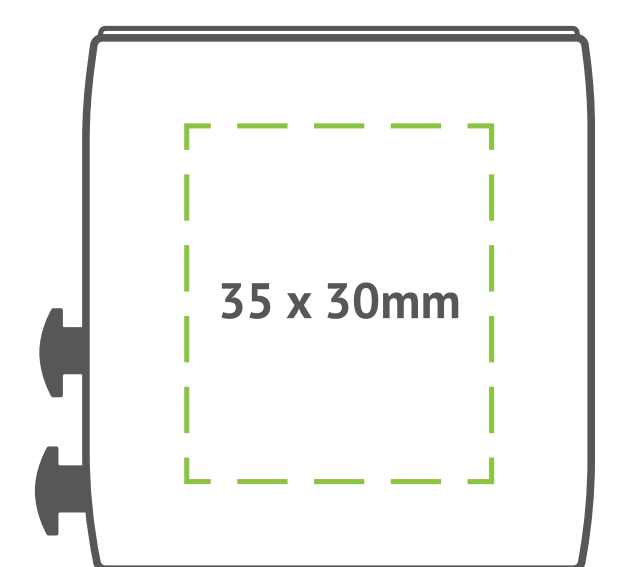

Top 20W & 45W



45W Version



20W Version

Total DC Output: 45W

Input: 100-250V~, 50-60Hz, 1.3A

Single Port Output:

USB-A1/A2 Output: 5V=2.4A 12W

USB-C2/C3 Output: 5V=3A 15W

USB-C1 Output: 5V=3A 15W, 9V=3A 27W,
12V=3A 36W, 15V=3A 45W, 20V=2.25A 45W

Multi-port Output:

USB-C1 Output: 5V=2.4A 12W, 9V=2.77A 25W,
12V=2.25A 27W, 15V=1.8A 27W, 20V=1.35A 27W.

USB-A1+A2 Output: 5V=3A 15W(Total), 2.4A Max Per Port

USB-C2+C3 Output: 5V=3A 15W (Total)

Total DC Output: 20W

Input: 100-250V~, 50-60Hz, 0.5A

USB-C1/C2 Output:

5V=3A 15W, 9V=2.22A 20W, 12V=1.67A 20W

USB-A Output:

5V=3A 15W, 9V=2A 18W, 12V=1.5A 18W

USB-C1/C2 Output + USB-A Output: 5V=3A 15W Max



Do not use with appliances requiring ground wire.

Compatible Plug Types



TYPE-A




TYPE-B



TYPE-J



TYPE-E/F

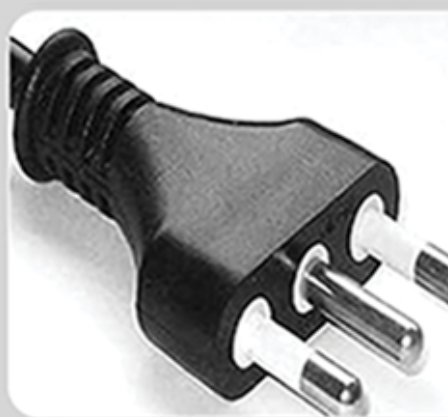

TYPE-L



TYPE-C



TYPE-I



TYPE-G